

DELTA[®]-WDC

Technical data sheet

Description:


A combination of a vapour permeable membrane plus a self-adhesive bitumen rubber waterproofing layer. Makes the base of a wooden construction absolutely airtight!

The top layer is sturdy roofing underlay, grammage approx. 140 g /m², SD-value approx. 0,02 m, so breathable.


Lower layer is a waterproofing and damp proof membrane from 1,5 mm bitumen rubber with an SD-value of approx. 150 m, not breathable.

DELTA-WDC 20:

Bituminous waterproofing layer of 20 cm, with bilateral overlapping strips of 15 cm.

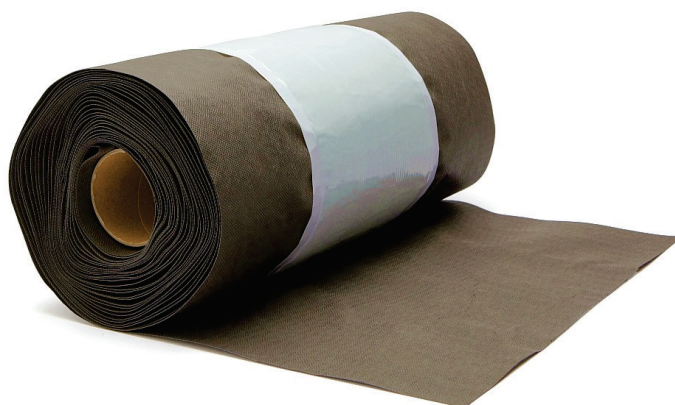

■ Lengde/Length: **15 m** ■ Bredde/Width: **0,20 m**

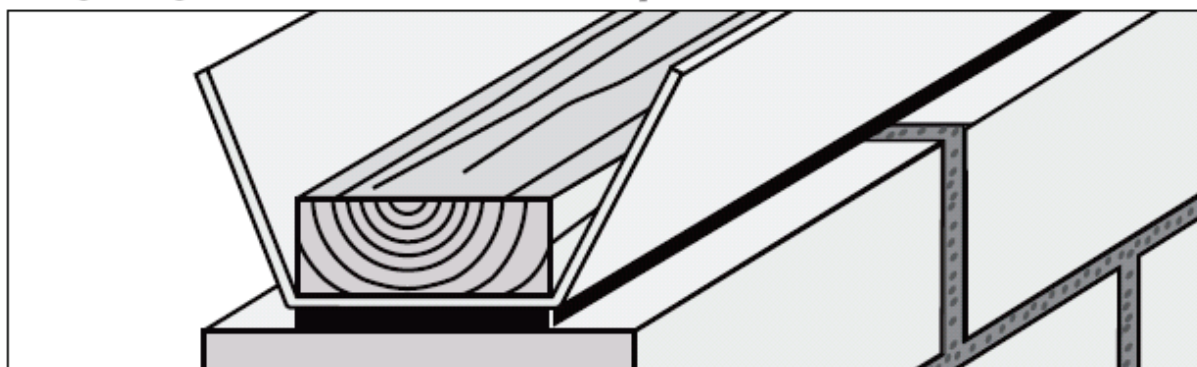


- **Total width = 50 cm, length: 15 m / roll.**

DELTA-WDC 15:

Bituminous waterproofing layer of 15 cm, with one-sided overlapping strips of 15 cm.



■ Lengde/Length: **15 m** ■ Bredde/Width: **0,15 m**

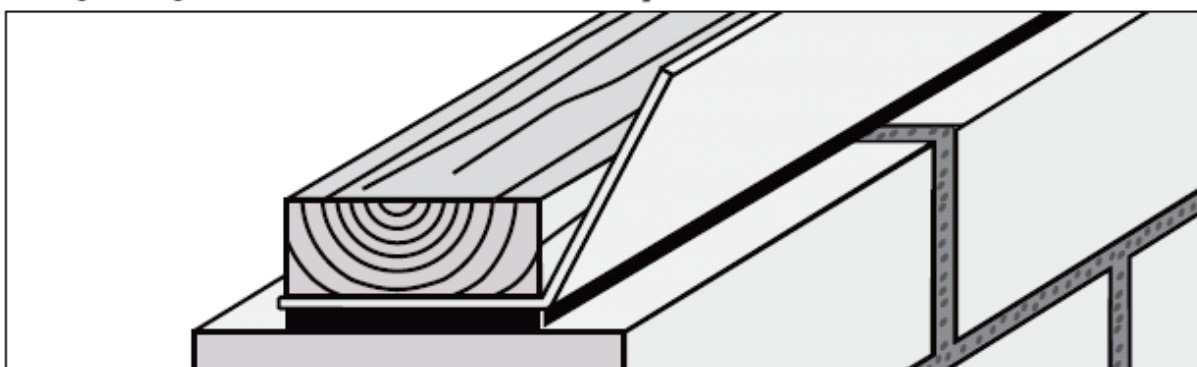

- **Total width = 30 cm, length: 15 m / roll.**